



ประตูอัตโนมัติ



BOX 3500 THREE-PHASE

GEAR MOTOR IN OIL-BATH FOR INDUSTRIAL USE FOR SLIDING GATES UP TO 3500 KG.

Gear in oil –bath



Internal Foto



- Reliability of the oil-bathed gear motor.
- Galvanized sheet box strong and polyester painted for heavy applications of industrial type.
- Access door to the manual release with key for more security.
- Mechanical torque regulator in oil-bath.
- Special thermo –treatment of the inner components for max resistance in the industrial use.
- High quality IP 65 mechanical limit switch in metal box.
- Control unit GATE 1 three-phase.

On request special version BOX 6000 (for sliding gates of max 6000 Kg).


TECHNICAL DATA

Voltage supply
Motor power
Absorbed current
Operating temperature
Protection degree
Clutch
Limit switch
Gate speed
Weight
Electronic Control Unit
Gate max weight


“Three-phase motor”

220V/380V-50/60Hz
950W
4.2/2.8A
-20°C+55°C
IP 55
Bidisc oil bath
Mechanical
0.2m/sec Z24
48Kg
23001010
3500Kg

Dimensions (mm)

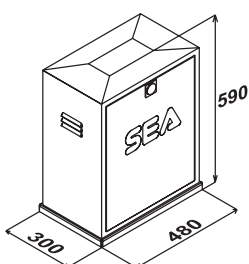

CABLE LAYOUT

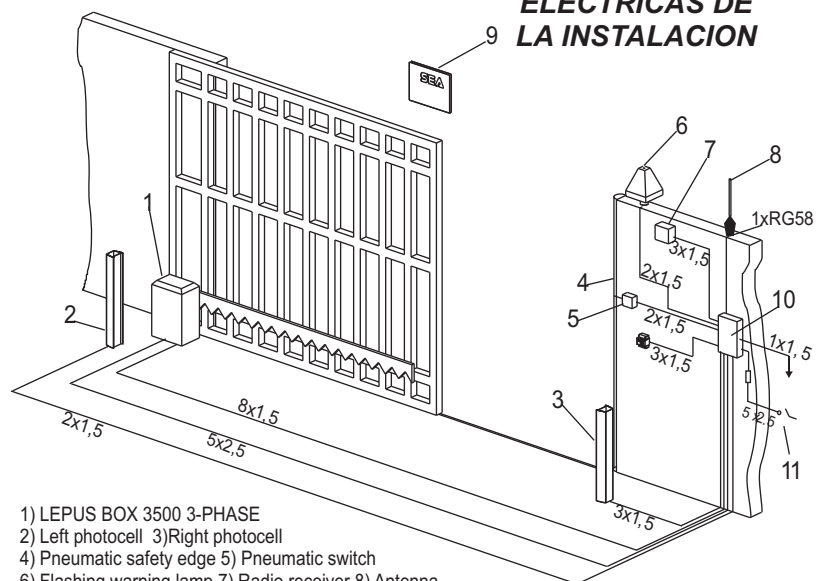

CONEXIONES ELECTRICAS DE LA INSTALACION

- 1) LEPUS BOX 3500 3-PHASE
- 2) Left photocell 3) Right photocell
- 4) Pneumatic safety edge 5) Pneumatic switch
- 6) Flashing warning lamp 7) Radio receiver 8) Antenna
- 9) Warning notice 10) Connector block 11) Differential Switch 16A - 30mA